


Inline Microphone Transformer LL1659

Turns ratio:	10 : 1
Dims:	
Length	35mm
Width	15 mm (max)
Height above PCB	12 mm (max)
Distance between pins	5.08 x 30.48 mm (0.2" x 1.2")

Side and top views and winding schematics:

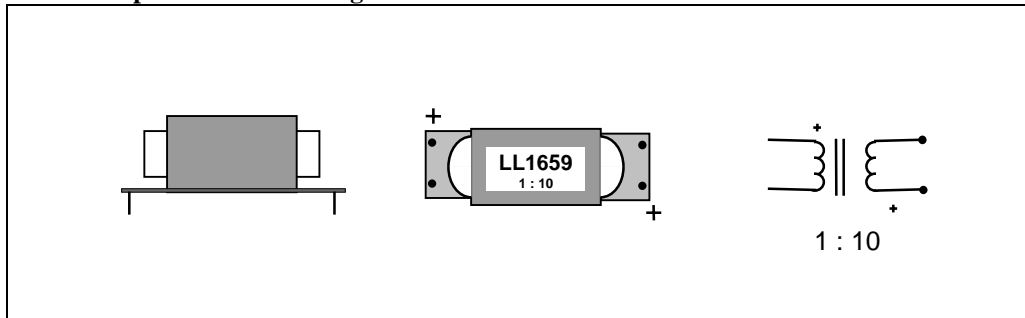

Static resistance of primary:	810 Ω
Static resistance of secondary:	14 Ω
Core:	Amorphous strip core
Max signal level:	approx. 1.2 V / 12 V r.m.s. @ 50 Hz
Isolation between windings / between windings and core:	2 kV/1 kV