

S.Q. TUBE

Special quality double triode designed for use in computer circuits.


QUICK REFERENCE DATA

Life test	10 000 hours	
Low interface resistance		
Base	Noval	
Heating	Indirect A.C. or D.C.; Parallel supply	
Heater voltage	V_f	6.3 or 12.6 V
Heater current	I_f	640 or 320 mA
Anode current	I_a	36 mA
Mutual conductance	S	15 mA/V

DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

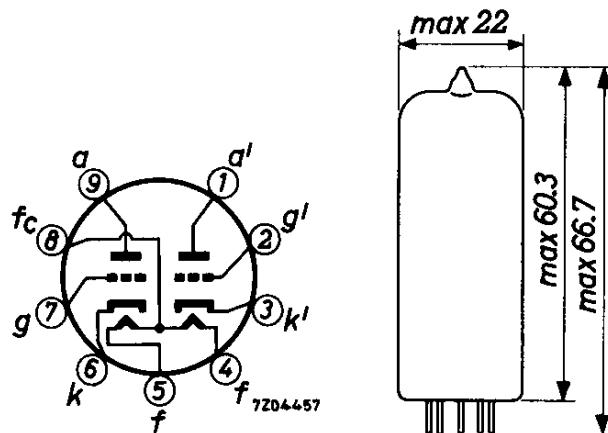

CHARACTERISTICS

- Column I Nominal value or setting of the tube
 II Range values for equipment design: Initial spread
 III Range values for equipment design: End of life

		I	II	III	
Heater voltage (pin 8 and 4 + 5)	V_f	6.3			V
Heater current	I_f	640	605 - 675		mA
Heater voltage (pin 4 and 5)	V_f	12.6			V
Heater current	I_f	320			mA
Anode voltage	V_a	120			V
Grid voltage	$-V_g$	2			V
Anode current	I_a	36	26 - 45		mA
Mutual conductance	S	15			mA/V
Amplification factor	μ	24			
Negative grid current	$-I_g$		max. 0.2	max. 1.0	μ A
Anode voltage	V_a	120			V
Cathode resistor	R_k	55			Ω
Mutual conductance	S	15	11.2-18.8	min. 8	mA/V
Anode voltage	V_a	90			V
Grid current	I_g	250			μ A
Anode current	I_a		41 - 62	min. 24	mA
Cut-off voltage	$-V_g$	14			V
Anode voltage	V_a	150			V
Anode current	I_a		max. 0.2		mA
Leakage current between cathode and heater	I_{kf}		max. 15	max. 30	μ A
Voltage between cathode and heater = 200 V					
Insulation resistance between two electrodes			min. 100	min. 20	$M\Omega$

CAPACITANCES Each system if applicable

		I	II	
Anode to cathode and heater	C_a/kf	1.1	0.75-1.45	pF
	$C_{a'}/k'f$	1.0	0.65-1.35	pF
Grid to cathode and heater	C_g/kf	6.0	5.3- 6.7	pF
	C_{ag}	4.0	3.4- 4.6	pF
Anode to grid	$C_{a'g'}$	4.1	3.4- 4.8	pF
	C_{kf}	4.0		pF
Cathode to heater	$C_{aa'}$	0.6	max. 0.8	pF
Grid to grid other section	$C_{gg'}$		max. 0.15	pF
Anode to grid other section	$C_{ag'}$		max. 0.1	pF

LIFE

Production samples are tested to be within the end of life values (column III) during 10 000 hours under the following conditions.

Anode supply voltage	V_{ba}	150	V
Anode resistor	R_a	1.5	kΩ
Grid supply voltage	V_{bg}	150	V
Grid resistor	R_g	62	kΩ
Voltage between cathode and heater (cath. neg.)	V_{kf}	120	V

LIMITING VALUES (Absolute max. rating system)

Anode voltage	V_{a_0}	max.	600	V
	V_a	max.	300	V
Anode dissipation	W_a	max.	4.5	W
Anode dissipation (both sections)	$W_{a+a'}$	max.	8.0	W
Grid voltage	$-V_g$	max.	100	V
	$+V_g$	max.	1	V


LIMITING VALUES (continued)



Grid voltage, peak	}	+V _{gp}	max.	30	V
Pulse duration max. 10 μ s		-V _{gp}	max.	200	V
Duty factor max. 0.01					
Grid current	I _g	max.	8	mA	
Grid peak current	I _{gp}	max.	200	mA	
Pulse duration max. 10 μ s					
Duty factor max. 0.01					
Cathode current	I _k	max.	60	mA	
Cathode peak current	I _{kp}	max.	400	mA	
Pulse duration max. 10 μ s					
Duty factor max. 0.01					
Voltage between cathode and heater d.c. component	V _{kf}	max.	200	V	
Bulb temperature	V _{kf}	max.	120	V	
	t _{bulb}	max.	160	°C	
Grid resistor with automatic bias	R _g	max.	1	M Ω	
Grid resistor with fixed bias	R _g	max.	0.5	M Ω	


Heater voltage: The average heater voltage should be 6.3/12.6 V.

Variations of the heater voltage exceeding the range of 6.0/12.0 V to 6.6/13.2 V will shorten the tube life.

The tolerance of heater current (column II) should be taken into account.

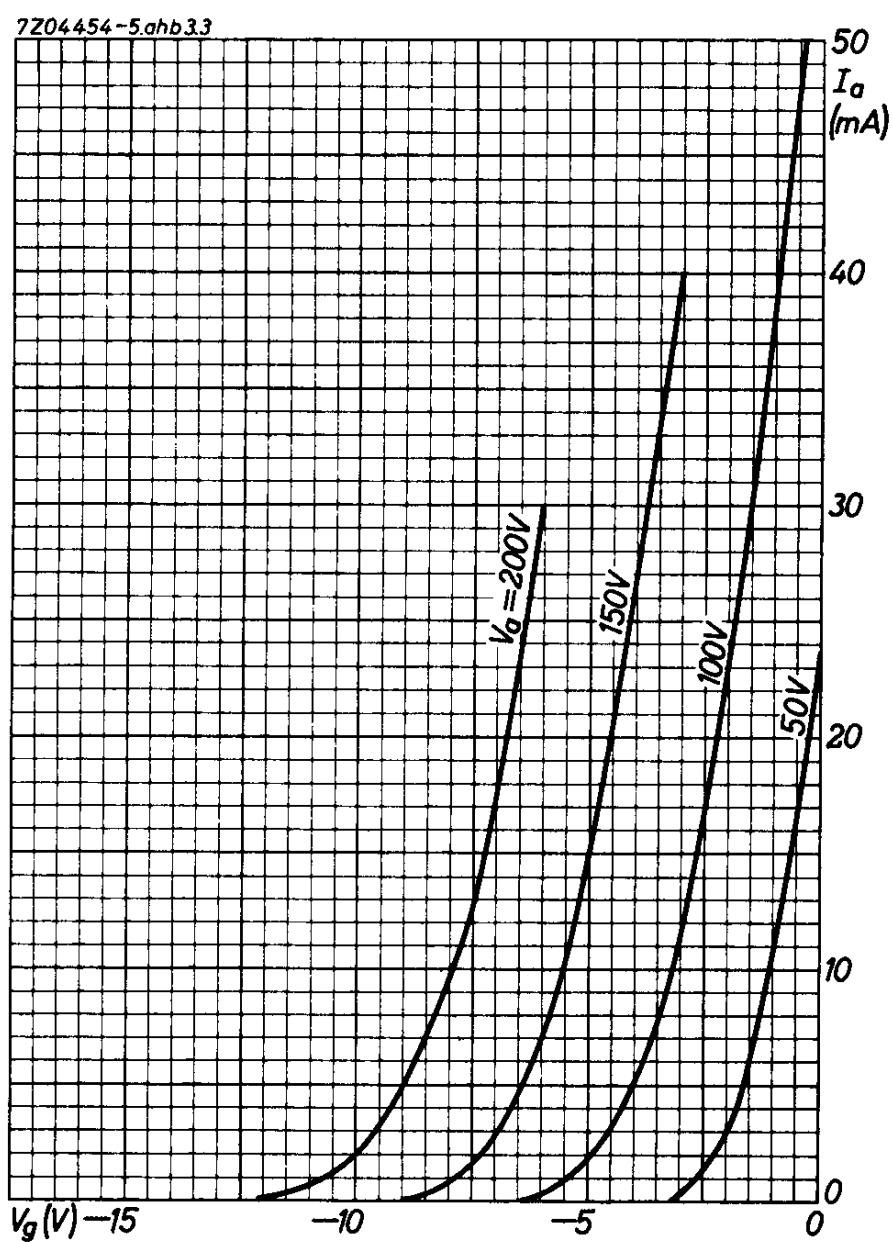

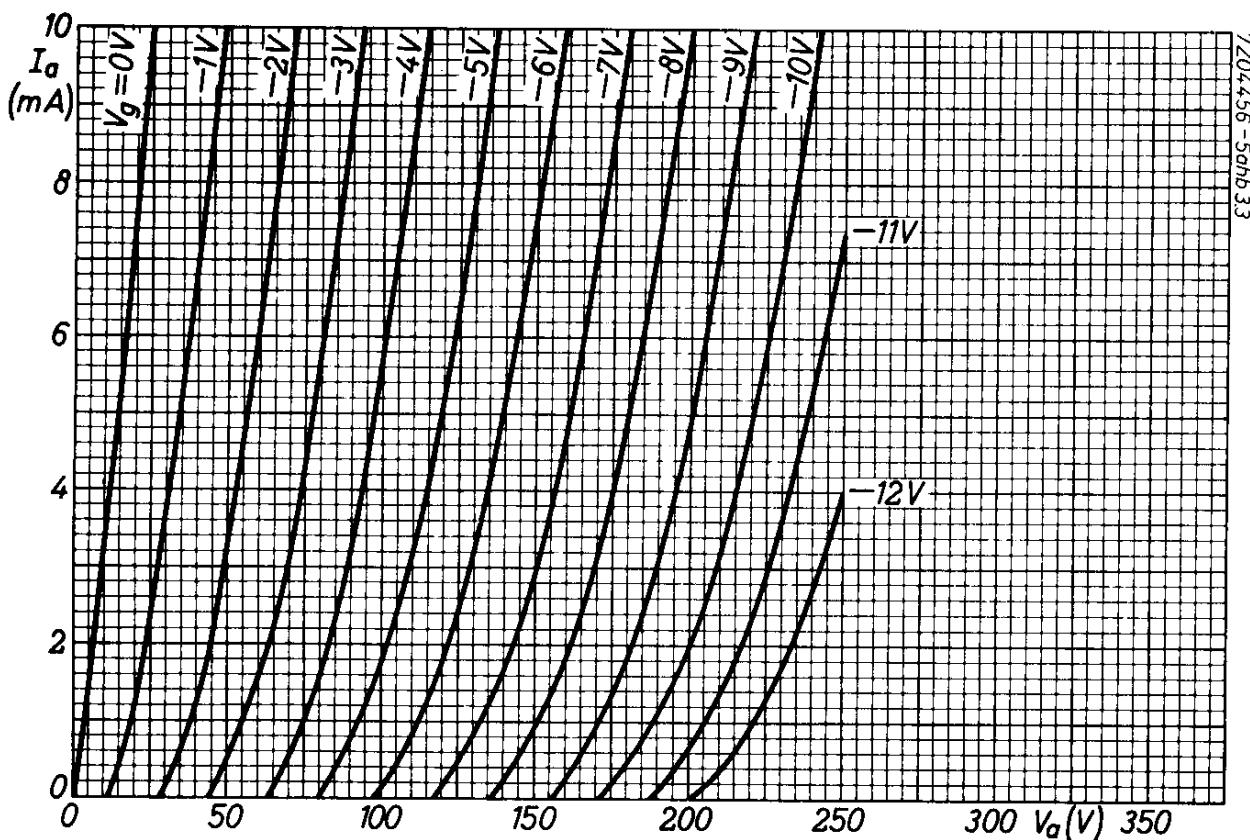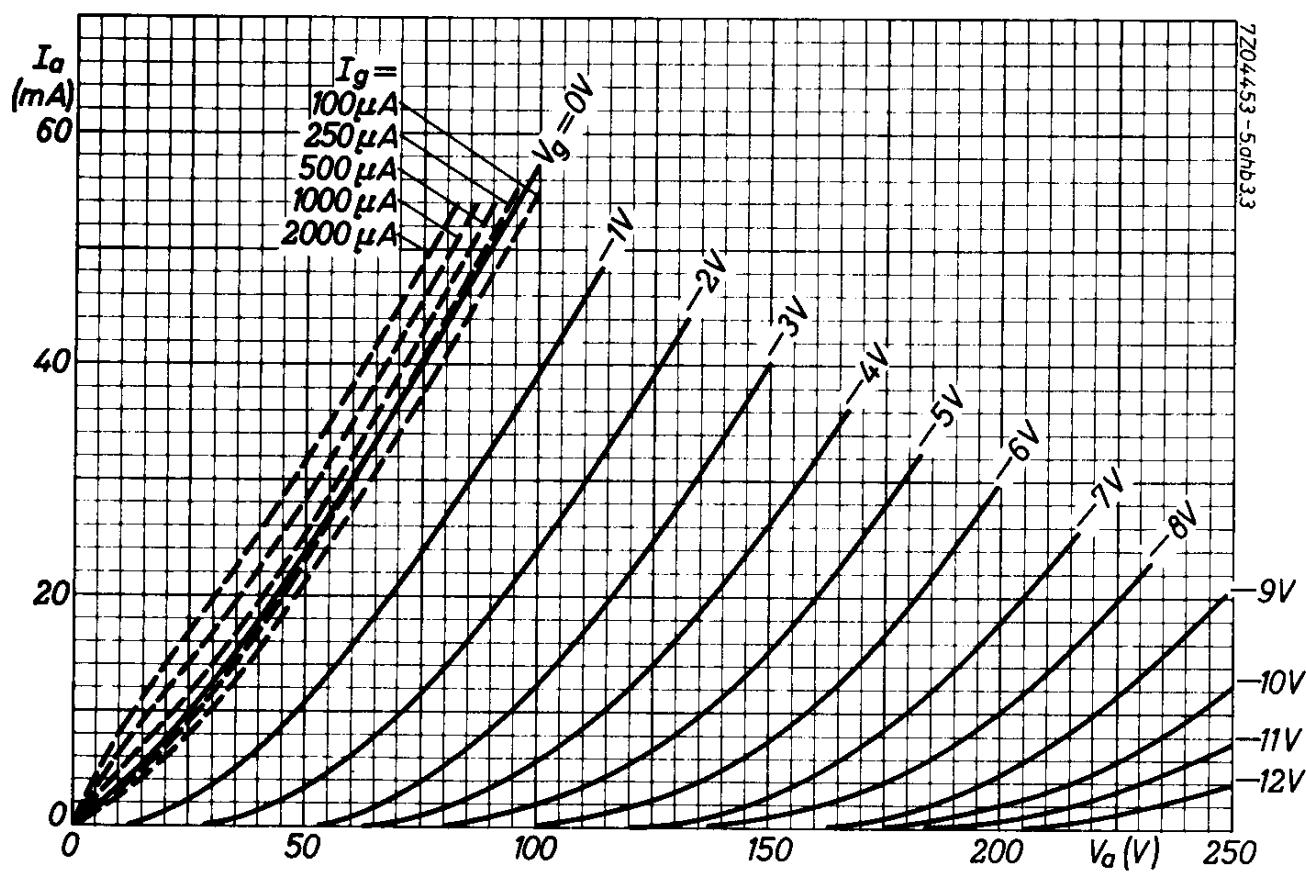

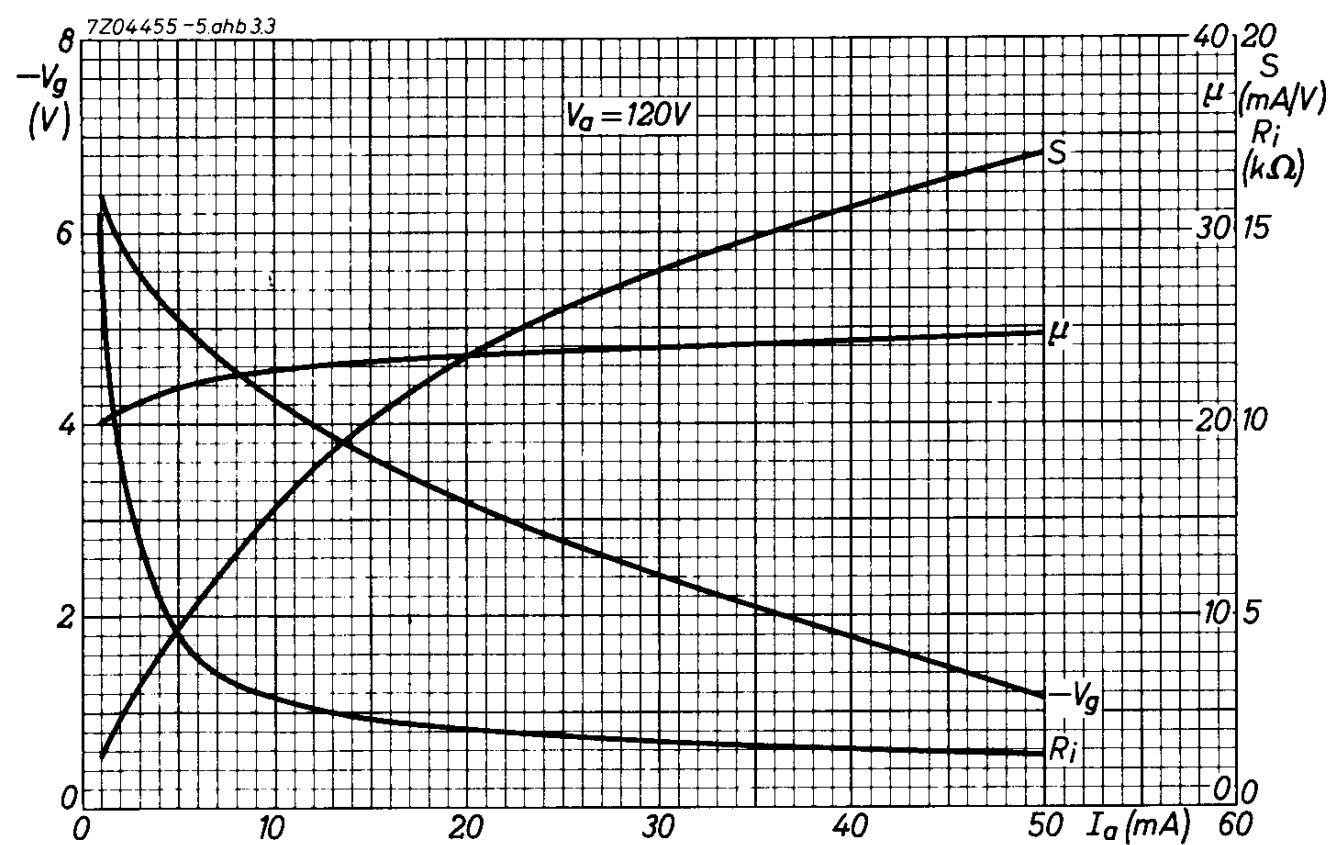

PHILIPS

Data handbook



**Electronic
components
and materials**

E182CC

page	sheet	date
1	1	1968.12
2	2	1968.12
3	3	1968.12
4	4	1968.12
5	5	1968.12
6	6	1968.12
7	7	1968.12
8	FP	2000.12.04